

RODES WALL-MOUNTED LUMINAIRE

A recessed luminaire for outdoors lighting including, according to item:

- ROA 1X. A luminaire designed for fitting a Tc-S 9W compact fluorescent lamp, incorporating a power supply unit.

- ROA 2X. A luminaire designed for fitting a type QT-DE 150W linear halogen lamp.

THE ROA 1X LUMINAIRE

It consists of the main body and an opal diffuser made of thermoplastics that are highly resistant to severe climatological conditions and salty environments, gasket and reflector. It includes two Pg 13.5 type stuffing boxes and power supply wiring entry. It is opened by releasing two stainless steel screws.

THE ROA 2X LUMINAIRE

Glass body and frame manufactured from pressure cast aluminium. Steel support. Polyester powder varnished in metallic grey. Grey plastic rear connection box. Glass frame waterproofing system- Stainless steel screws and external accessories. 5 mm thick lime-soda type glass, tempered to withstand impacts and thermal shocks. Pure aluminium reflector with hammer finish surface. Nickel coated copper wiring coated in PTFE. PG 13.5 stuffing box. Silicon protections.

DOME






Manufactured from cast bronze with as-cast finish (ref. ROA X1) or in cast aluminium with a cast black Oxiron painted effect (ref. ROA X2). Its recess measurements are 224 x 286mm by 156mm deep. It includes two Ø37mm side orifices for cable entry and exit and two Ø10mm side orifices to insert the studs that screw into the cover.


COVER

Manufactured from cast bronze with as-cast finish (ref. ROA X1) or in cast aluminium with a cast black Oxiron painted effect (ref. ROA X2). It works as a grille cove fixed over the dome by means of three stainless steel screws. Two studs are screwed into the sides of the dome during initial assembly and act as the axis on which the cover swivels to open

ROA 1X
Lamp TC-S 9W
Lampholder G23
Voltage AC 230V
Frequency 50Hz
System input 13W

ROA 2X
Lamp QT-DE 150W
Lampholder R7s
Voltage AC 230V
Frequency 50Hz
System input 150W

CLASS		
I		
ROA 1X		
IP		
44		
ROA 2X		
IP		
54		

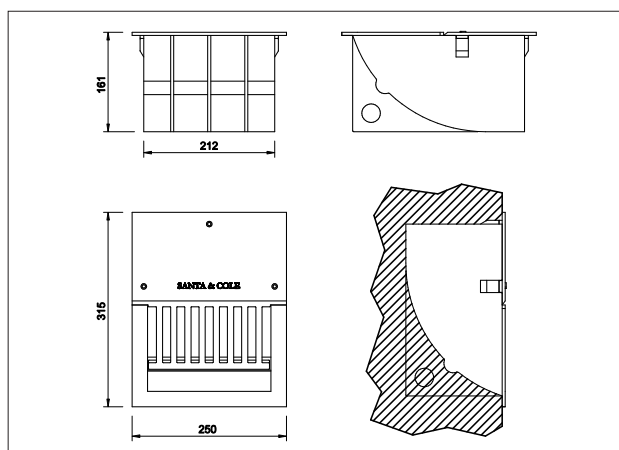

RODES WALL-MOUNTED LUMINAIRE

