
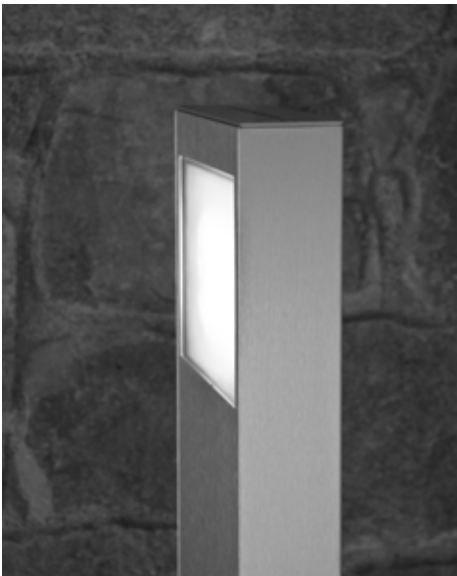


Rama LED

 ADI FAD
DELTA DE PLATA 2001

Gonzalo Milá
2000



Part of the Rama family, this vertical bollard provides oblique lighting for outdoor spaces.

Baliza urbana creada para responder a todas las necesidades de un sistema integral y homogéneo de iluminación.



This bollard is an independent offshoot of the Rama street lamp and shares its light, stylized appearance. It is installed vertically to provide oblique lighting at the horizontal level to illuminate access points or to highlight paths.

Materials and finishes

Recycled extruded aluminium with anodized surface. Injection aluminium cover with grey paint finish. Extruded aluminium interior sink with black anodized surface. Translucent methacrylate cover.

Base made of anodized painted aluminium.

Luminaire

LED technology optical unit with asymmetric reflector lenses to minimise light pollution.

12 W 12 LED (3000 K, 350 mA)

Installation and maintenance

The bollard is delivered in two parts: base and luminaire.

Fixed by steel anchor bolts with anti-corrosive protection placed in the cement. Template and anchor bolts are included.

The cover can be removed to take out the inner tray for maintenance.

Standard replacements and maintenance for electrical fittings.

LED technology minimises functional maintenance of the luminaire.

Weight

12 Kg.

Nacida de la farola Rama LED, la baliza comparte su aspecto ligero y estilizado. Elemento urbano de buen rendimiento lumínico, se implanta en posición vertical para iluminar de forma rasante los planos horizontales, marcar accesos o referenciar recorridos.

Materiales y acabados

Cuerpo de extrusión de aluminio reciclado acabado anodizado con tapa de inyección de aluminio acabada pintada en color gris. Disipador interior de extrusión de aluminio acabado anodizado negro. Difusor de metacrilato.

Base fabricada en aluminio anodizado y pintado.

Luminaria

Grupo óptico de tecnología LED dotado de lentes refractoras de distribución asimétrica para la minimización de la contaminación lumínica.

12 W 12 LED (3000 K, 350 mA)

Instalación y mantenimiento

La baliza se entrega desmontada en dos partes: base y luminaria.

Con la baliza se entregan la plantilla y los pernos de anclaje.

La retirada de la tapa permite extraer la bandeja interior para su mantenimiento.

La tecnología LED minimiza el mantenimiento funcional de la luminaria.

Peso

12 Kg.

Luminaire characteristics Características luminaria

CE RoHS



Lighting Luminaria

Extruded aluminium
Extrusión aluminio



Anodised/Anodizado

Base Base

Aluminium with paint finish
Aluminio acabado pintado



RAL. 9006

Sizes in cm
Cotas en cm

