

Tekiò, the Japanese word for adaptation, merges ancient artisan techniques with Warm to Dim LED technology that enables control of intensity and colour temperature. Tekiò combines traditional and avant-garde in a unique and contemporary design, featuring modern lighting structures carefully dressed in handmade paper. Linear or circular shapes can be created by combining various modules.

London designer Anthony Dickens was inspired by the traditional Japanese lantern made from washi paper, which dates back to the 14th century and is now an everyday object in the life of the Japanese. The paper, used by Isamu Noguchi to create the famous Akari lamps, has been inscribed on UNESCO's List of the Intangible Cultural Heritage of Humanity. Washi is resilient and ductile, even malleable. It has a warm texture that filters in a soft, gentle light. Santa & Cole relies on the hands of experts in the Japanese city of Mito for manufacturing the paper, one of the cities specialised in its production.

General description:

White S&C metal structure with matte finish.

Washi Japanese paper shade.

Structure length:

(A) 67 cm / 26.4"

(B) 120 cm / 47.2"

(C) 173 cm / 68.1"

(D) 226 cm / 89"

White S&C metallic circular ceiling plate with power supply incorporated.

Methacrylate inner diffuser.

Electric cable length: 5 m / 196.8"

Approximate weight (unpacked):

(A) Tekiò Vertical P1: 3 Kg / 6.6 lb

(B) Tekiò Vertical P2: 4,5 Kg / 9.9 lb

(C) Tekiò Vertical P3: 6 Kg / 13.2 lb

(D) Tekiò Vertical P4: 7,5 Kg / 16.5 lb

Tekiò Vertical

Anthony Dickens. 2017
Pendant lamps

Technical information:

Light source included.

(A) LED strip

Rated input wattage: 43 W / UL 34 W
Luminous flux: 1.251 lm / UL 964 lm

(B) LED strip

Rated input wattage: 73 W / UL 56 W
Luminous flux: 2.190 lm / UL 1.687 lm

(C) LED strip

Rated input wattage: 100 W / UL 73 W
Luminous flux: 3.128 lm / UL 2.315 lm

(D) LED strip

Rated input wattage: 120 W / UL 87 W
Luminous flux: 4.067 lm / UL 3.051 lm

(A, B, C, D)

Operating voltage: 24VDC
Colour Temp.: 2.200K - 2.700K
CRI: 85
Lifetime: 40.000 h

Input voltage: 100 ~ 277 Vac.


(50 Hz / 60 Hz). According to destination.

Built-in LED

Suitable for dimming 1-10V / UL 0-10V. (Not included external dimmer switch 1-10V / UL 0-10V). Warm dim control 2200K- 2700K.

Energy efficiency class (E.E.C):
A⁺⁺... A.

Suitable only for indoor use.
Always use this light source.

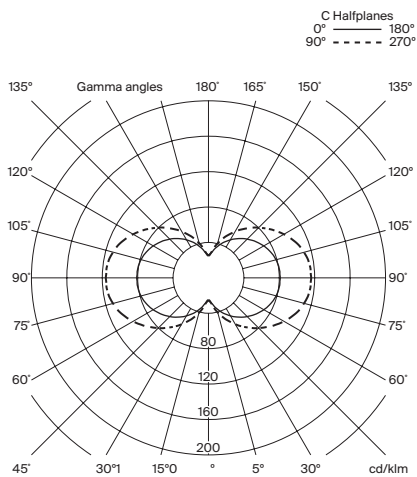


Regulations:

CE
UNE-EN 60598
UNE-EN 55015
UNE-EN 60529

UL

Dry location only
UL-1598
UL-8750
E-336377

Models: Tekiò Vertical

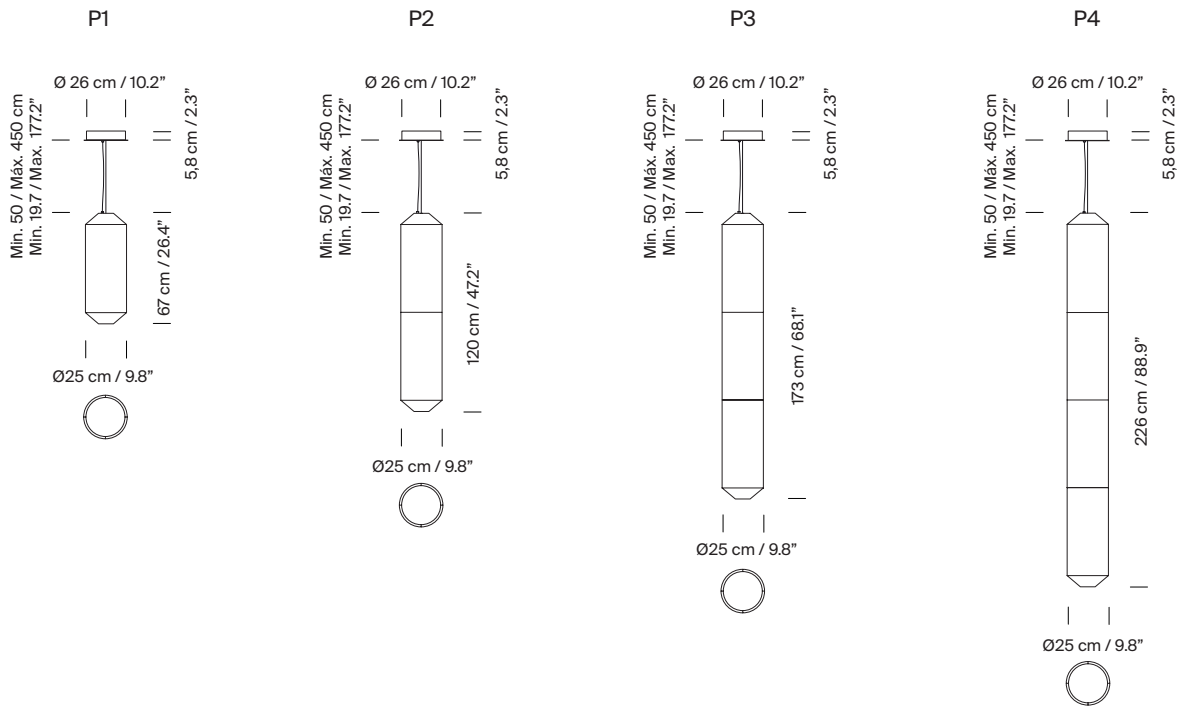

Collection:
 Pendant lamps



Tekiò Vertical



Tekiò Horizontal



Tekiò Circular