
#### **Tekiò Vertical** Anthony Dickens. 2017 Pendant lamps

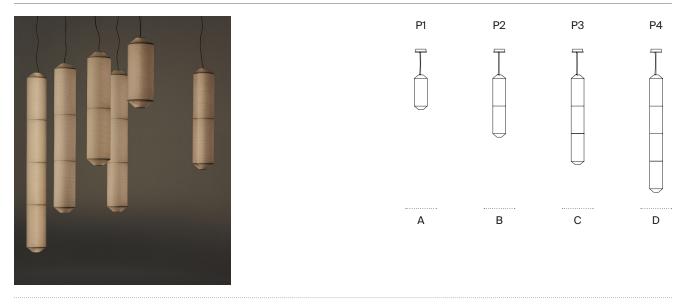

#### 

Tekiò, the Japanese word for adaptation, merges ancient artisan techniques with Warm to Dim LED technology that enables control of intensity and colour temperature. Tekiò combines traditional and avant-garde in a unique and contemporary design, featuring modern lighting structures carefully dressed in handmade paper. Linear or circular shapes can be created by combining various modules.

London designer Anthony Dickens was inspired by the traditional Japanese lantern made from washi paper, which dates back to the 14th century and is now an everyday object in the life of the Japanese. The paper, used by Isamu Noguchi to create the famous Akari lamps, has been inscribed on UNESCO'ws List of the Intangible Cultural Heritage of Humanity. Washi is resilient and ductile, even malleable. It has a warm texture that filters in a soft, gentle light. Santa & Cole relies on the hands of experts in the Japanese city of Mito for manufacturing the paper, one of the cities specialised in its production.

#### **General description:**

Washi Japanese paper shade. Metal structure. Structure length: (A) 67 cm / 26.4" (B) 120 cm / 47.2" (C) 173 cm / 68.1" (D) 226 cm / 89" White grey metallic circular ceiling plate with power supply incorporated. Electric cable length: 5 m / 196.8"

#### Approximate weight (unpacked):

(A) Tekiò Vertical P1: 3 Kg / 6.6 lb (B) Tekiò Vertical P2: 4,5 Kg / 9.9 lb (C) Tekiò Vertical P3: 6 Kg / 13.2 lb (D) Tekiò Vertical P4: 7,5 Kg / 16.5 lb Anthony Dickens. 2017 Pendant lamps

# SANTA & COLE

C Halfplanes

0° \_\_\_\_\_ 180° 90° - - - - 270°



Technical information: Light source included (dimmable)

(A) LED strip Rated input wattage: 43 W / UL 34 W Luminous flux: 1.251 lm / UL 964 lm

(B) LED strip Rated input wattage: 73 W / UL 56 W Luminous flux: 2.190 lm / UL 1.687 lm

(C) LED strip Rated input wattage: 100 W / UL 73 W Luminous flux: 3.128 Im / UL 2.315 Im

(D) LED strip Rated input wattage: 120 W / UL 87 W Luminous flux: 4.067 lm / UL 3.051 lm

(A, B, C, D) Operating voltage: 24VDC CCT: 2.200K - 2.700K CRI: 90 Lifetime: 40.000 h

Built-in LED Suitable for dimming 1-10V / DALI ( UL 0-10V ). (Not included external dimmer switch 1-10V / UL 0-10V). Dim to Warm control 2200K- 2700K.

Suitable only for indoor use. Always use this light source. Input voltage: 100 ~ 277 Vac. (50 Hz / 60 Hz). According to destination.

#### **Regulations:**

CE UNE-EN 60598 UNE-EN 55015 UNE-EN 60529


UL Dry location only UL-1598 UL-8750 E-336377

#### Maintenance:


Clean with a smooth cloth. Do not use ammonia, solvents or abrasive cleaning products.

#### Others:

The lamp is delivered in different packages. The assembly instructions are delivered with the product.



### Models: Tekiò Vertical

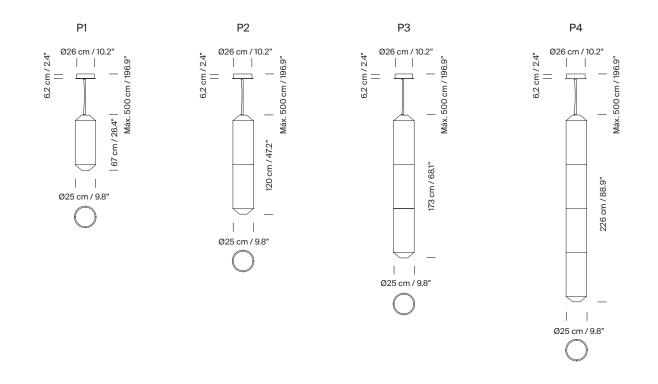

## Collection:

Pendant lamps



Tekiò Vertical



Tekiò Horizontal



Tekiò Circular