









A precious object that offers high-quality illumination and captivates through its warm reflections. Its two vertical spotlights on either side of the plate produce a sense of volume that enriches the room.

Made in two sizes, small and large, and in two different colours, white or intense red, the nuances of the lacquered surface are revealed when switched on while its sculptural dignity prevails when turned off.

General description:

Metallic structure and canopy in glossy white or red.
Canopy included with power supply incorporated.
Suitable for dimming 1-10V / DALI. (Not included external dimmer switch 1-10V / DALI).
Electric cable length: 4 m / 157.5"

Approximate weight (unpacked):

(A) Bijou S: 1,1 kg / 2.4 lb (B) Bijou L: 4,1 Kg / 9 lb

Technical information:

Light source included (dimmable). 2 x COB LEDs module

(A) COB LEDs module Rated input wattage: 11,4 W Operating voltage: 9VDC Luminous flux: 262 Im

(B) COB LEDs module Rated inpout wattage: 20 W Operating voltage: 19 VDC Luminous flux: 602 Im

Colour Temp.: 2.700 K

CRI: 90

Lifetime: 40.000 h

Built-in adjustable LED.

Suitable for dimming 1-10V / DALI. (Not included external dimmer switch 1-10V / DALI).

Energy efficiency class (E.E.C): A++... A.

Suitable only for indoor use

Input voltage: 110 ~ 240 Vac. (50 Hz / 60 Hz).

According to destinatio

Bijou

Antoni Arola. 2022 Pendant lamps



Regulations:

UNE-EN 60598 UNE-EN 55015 UNE-EN 60529 UNE-EN 62031

UNE-EN 61000-3-2 UNE-EN 61347-2-13

UL Damp location UL-1598 UL-8750 E-336377

Maintenance:


Clean with a smooth cloth. Do not use ammonia, solvents or abrasive cleaning products.

Others:

The lamp is delivered in one package.

The assembly instructions are delivered with the product.

Model A: Bijou S

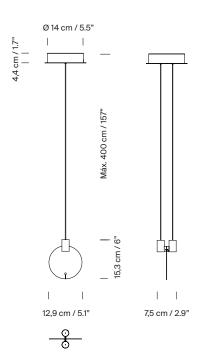

Model B: Bijou L

